Superior Extrusion, Inc.
Committed to Your Success

IN-HOUSE STANDARDS BOOK

Tubes, Channels, Angles, Flat Bar, Rod, I Beams, T & Z Bars, Decking

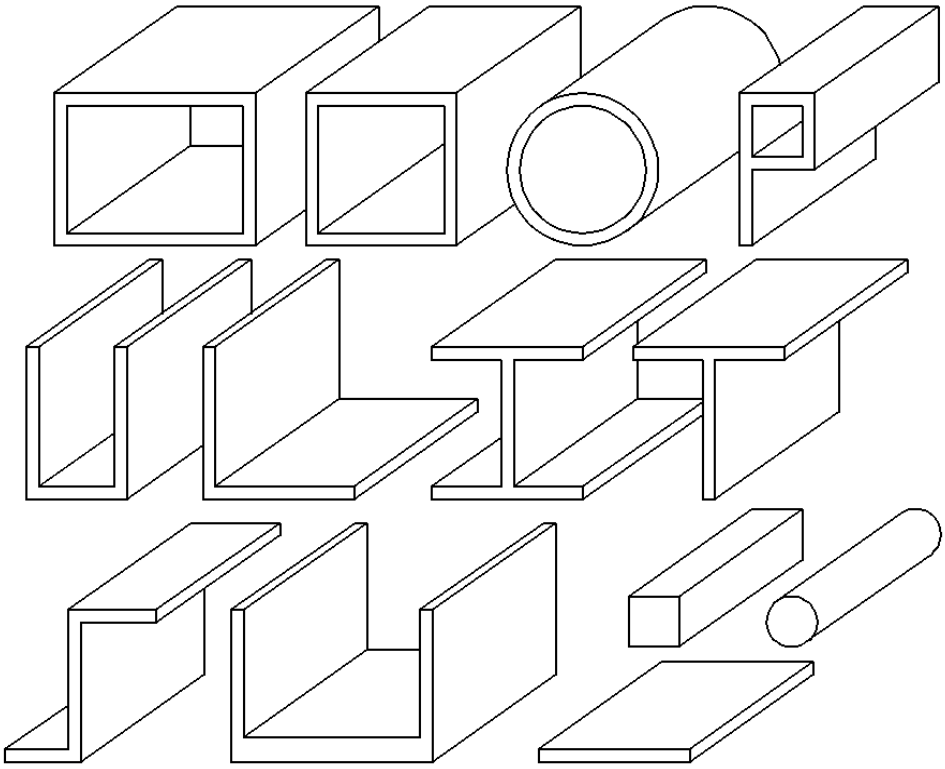

Phone:
906-346-7308

Superior Extrusion, Inc.

Fax:
906-346-7890

118 Ave. G - Gwinn, MI 49841

Web Site: www.superiorextrusion.com
e-mail: sales@superiorextrusion.com

SUPERIOR EXTRUSION, INC.

In-House Standards Info.

Superior Extrusion, Inc. is proud to offer the following standard shapes. These profiles do not require the purchase of any additional tooling. Our minimum order quantity is 1,000 pounds per profile which may be split into various cut lengths. If a smaller run is required, a $750 setup charge will be applied to the order.

SEI Offers the Following Services:

Standard and custom profiles in the 6000 series alloys. We offer aluminum alloys 6005, 6061, and 6063.

Cut lengths from 60" to 360" with a standard cut tolerance of +/- 0.125".

Close tolerance cutting on lengths from 1" to 290" in our Fabrication Department for an additional offline cutting charge.

Fabrication including miter cutting, punching, deburring, and CNC machining.

SEI has working relationships with many vendors. Additional services to include painting, powder coating, anodizing and expanded fabrication operations.

All orders will have a tolerance of +/- 10% on the piece count unless otherwise stated at the time of order.

Our standards list is constantly growing. If you do not see something you need, please contact our Sales Department at 906-346-7308 or sales@superiorextrusion.com

Contents:

Shape	Page
Rectangle Tubes	3,4
Square Tubes	5,6
Round Tubes	7
'P' Tubes	8
Angles	9,10
Equal Wall Channels	11,12
Un-Equal Wall Channels	13
American Standard Channels	13
Aluminum Association Channels	13
Flat Bars	14
Round Bars	15
'I' Beams	16
'T' Bars	17
'Z' Bars	17
Aluminum Decking	18

Rectangle Tubes



DIE #	A	B	C	D	WT/FT	
SH3297	0.500	1.000	0.060	0.078	0.193	
SH3329	0.500	1.000	0.125	0.015	0.376	
SH4321	0.500	1.500	0.125	0.015	0.526	
SH3748	0.500	2.250	0.050	0.090	0.311	
SH2283	0.656	3.000	0.070	0.063	0.587	
SH0567	0.740	1.590	0.125	0.031	0.623	
SH1503	0.750	1.500	0.125	0.015	0.600	
SH0532	0.750	1.500	0.125	0.125	0.588	
SH2655	0.750	1.750	0.081	0.125	0.440	
SH3266	0.750	2.250	0.125	0.015	0.826	
SH2504	0.875	1.400	0.090	0.090	0.444	
SH2763	1.000	1.250	0.125	0.125	0.584	
SH0529	1.000	1.290	0.090	0.100	0.446	
SH0261	1.000	1.500	0.062	0.125	0.342	
SH3467	1.000	1.500	0.090	0.032	0.502	
SH1039	1.000	1.500	0.090	0.250	0.483	
SH0926	1.000	1.500	0.100	0.030	0.551	
SH0583	1.000	1.500	0.125	0.063	0.671	
SH1815	1.000	1.500	0.125	0.080	0.670	
SH0281	1.000	2.000	0.062	0.063	0.425	
SH0426	1.000	2.000	0.083	0.063	0.562	
SH3171	1.000	2.000	0.095	0.015	0.641	
SH0005	1.000	2.000	0.125	0.015	0.826	*
SH0345	1.000	2.000	0.125	0.060	0.822	
SH0306	1.000	2.500	0.065	0.125	0.514	
SH2328	1.000	2.500	0.085	0.060	0.676	
SH2391	1.000	2.500	0.120	0.370	0.863	
SH2103	1.000	2.500	0.125	0.015	0.976	*
SH0218	1.000	3.000	0.060	0.125	0.547	
SH1046	1.000	3.000	0.090	0.090	0.817	
SH1050	1.000	3.000	0.110	0.090	0.990	
SH2234	1.000	3.000	0.125	0.015	1.126	*
SH0391	1.000	3.000	0.125	0.250	1.076	
SH1734	1.000	4.000	0.125	0.015	1.426	*
SH3977	1.000	5.000	0.125	0.015	1.726	
SH3077	1.000	6.000	0.125	0.015	2.026	
SH1550	1.040	2.100	0.125	0.250	0.812	
SH2414	1.063	1.314	0.109	0.125	0.548	
SH3819	1.125	1.500	0.094	0.094	0.541	
SH0432	1.125	1.625	0.125	0.125	0.738	
SH0392	1.125	1.750	0.120	0.125	0.742	
SH2783	1.125	2.000	0.125	0.015	0.863	
SH1347	1.250	1.063	0.109	0.125	0.533	
SH1051	1.250	1.750	0.100	0.250	0.631	
SH2217	1.250	2.000	0.094	0.188	0.664	
SH1750	1.250	2.000	0.160	0.010	1.126	
SH2446	1.250	2.500	0.125	0.094	1.042	
SH2706	1.250	3.000	0.094	0.060	0.914	
SH2218	1.250	4.000	0.094	0.188	1.115	
SH1068	1.250	4.000	0.219	0.016	2.577	
SH2609	1.250	4.500	0.125	0.125	1.634	
SH2883	1.320	4.570	0.188	0.125	2.472	
SH2323	1.375	3.000	0.250	0.015	2.326	
SH0433	1.437	1.937	0.125	0.125	0.925	

DIE #	A	B	C	D	WT/FT	
SH1558	1.500	1.750	0.125	0.125	0.884	
SH1047	1.500	2.000	0.100	0.090	0.785	
SH0146	1.500	2.000	0.125	0.015	0.974	*
SH0394	1.500	2.000	0.125	0.125	0.959	
SH0435	1.500	2.374	0.187	0.125	1.571	
SH1096	1.500	2.500	0.058	0.125	0.529	
SH0197	1.500	2.500	0.060	0.023	0.558	
SH0569	1.500	2.500	0.125	0.016	1.124	*
SH1059	1.500	2.500	0.125	0.125	1.112	
SH1177	1.500	3.000	0.062	0.125	0.640	
SH0905	1.500	3.000	0.080	0.030	0.833	
SH0560	1.500	3.000	0.125	0.015	1.276	*
SH3180	1.500	3.000	0.250	0.015	2.400	
SH1743	1.500	3.250	0.125	0.015	1.350	
SH0182	1.500	3.500	0.125	0.060	1.426	
SH3051	1.500	4.000	0.125	0.188	1.543	
SH0849	1.500	5.000	0.125	0.020	1.876	
SH2191	1.562	3.562	0.187	0.062	2.128	
SH2614	1.625	2.000	0.125	0.125	1.000	
SH0518	1.625	2.625	0.125	0.015	1.200	
SH0909	1.625	3.624	0.312	0.062	3.461	
SH0537	1.670	3.670	0.125	0.188	1.495	
SH0555	1.670	3.670	0.188	0.188	2.203	
SH1681	1.700	5.000	0.075	0.015	1.180	
SH0307	1.750	1.500	0.065	0.015	0.487	
SH3778	1.750	2.250	0.125	0.015	1.126	
SH0434	1.750	2.250	0.125	0.125	1.126	
SH2779	1.750	2.875	0.125	0.032	1.313	
SH2447	1.750	3.000	0.125	0.125	1.334	
SH2621	1.750	3.000	0.188	0.125	1.958	
SH0436	1.750	4.000	0.125	0.015	1.650	*
SH2558	1.750	4.000	0.125	0.125	1.650	
SH1165	1.750	4.000	0.188	0.015	2.425	
SH0266	1.750	5.000	0.125	0.060	1.950	
SH0533	1.750	5.000	0.125	0.125	1.934	
SH2444	1.750	5.000	0.188	0.125	2.861	
SH0493	1.874	2.374	0.187	0.125	1.739	

* Indicates Aluminum Association Standard Tubes

Rectangle Tubes Continued Next Page

Rectangle Tubes



DIE #	A	B	C	D	WT/FT	
SH0851	2.000	2.750	0.125	0.125	1.334	
SH3002	2.000	3.000	0.090	0.060	1.079	
SH0558	2.000	3.000	0.125	0.015	1.426	*
SH0164	2.000	3.000	0.125	0.125	1.426	
SH2452	2.000	3.000	0.125	0.125	1.409	
SH0850	2.000	3.000	0.188	0.125	2.070	
SH1925	2.000	3.000	0.250	0.015	2.700	*
SH2959	2.000	4.000	0.120	0.016	1.658	
SH0134	2.000	4.000	0.125	0.015	1.724	*
SH0163	2.000	4.000	0.125	0.125	1.726	
SH2330	2.000	4.000	0.125	0.125	1.709	
SH0590	2.000	4.000	0.188	0.062	2.532	
SH1041	2.000	4.000	0.188	0.125	2.515	
SH0525	2.000	4.000	0.250	0.015	3.300	*
SH2489	2.000	4.000	0.250	0.125	3.284	
SH2120	2.000	4.500	0.125	0.015	1.876	
SH0437	2.000	4.500	0.125	0.050	2.106	
SH0393	2.000	4.500	0.187	0.015	2.749	
SH0438	2.000	4.500	0.187	0.050	2.749	
SH0439	2.000	4.500	0.235	0.050	3.401	
SH2474	2.000	4.500	0.250	0.188	3.564	
SH1015	2.000	5.000	0.100	0.125	1.350	
SH0843	2.000	5.000	0.125	0.015	2.026	*
SH1369	2.000	5.000	0.125	0.125	2.009	
SH1082	2.000	5.000	0.125	0.125	2.012	
SH2174	2.000	5.000	0.188	0.125	2.989	
SH2005	2.000	5.000	0.250	0.125	3.888	
SH0147	2.000	6.000	0.125	0.015	2.324	*
SH0173	2.000	6.000	0.125	0.062	2.323	
SH0183	2.000	6.000	0.188	0.060	3.440	
SH0184	2.000	6.000	0.250	0.060	4.500	
SH2158	2.000	7.000	0.250	0.125	5.084	

DIE #	A	B	C	D	WT/FT	
SH1117	2.050	1.070	0.150	0.100	1.006	
SH2547	2.320	4.500	0.109	0.125	1.727	
SH2188	2.500	4.000	0.188	0.188	2.731	
SH1110	2.563	2.065	0.125	0.125	1.297	
SH0842	3.000	4.000	0.125	0.015	2.026	*
SH0524	3.000	4.000	0.250	0.015	3.900	*
SH0925	3.000	4.500	0.100	0.200	1.721	
SH0812	3.000	4.500	0.190	0.200	3.216	
SH2017	3.000	5.000	0.125	0.125	2.310	
SH3023	3.000	5.000	0.250	0.125	4.500	
SH3018	3.000	6.000	0.125	0.015	2.626	*
SH3480	3.000	6.000	0.188	0.190	3.858	
SH1837	3.000	6.000	0.250	0.125	5.084	
SH2781	3.000	6.000	0.313	0.250	6.221	
SH1981	3.000	8.000	0.188	0.030	4.830	
SH3412	3.125	5.000	0.250	0.125	4.559	
SH1759	3.250	6.250	0.125	0.015	2.775	
SH2202	3.500	6.000	0.250	0.015	5.400	
SH2693	3.500	6.000	0.250	0.250	5.336	
SH1104	4.000	5.000	0.135	0.030	2.828	
SH3345	4.000	6.000	0.140	0.015	3.266	
SH2285	4.000	6.000	0.250	0.125	5.684	
SH4279	4.000	8.000	0.250	0.188	6.864	

* Indicates Aluminum Association Standard Tubes

Square Tubes



DIE #	A	B	C	D	WT/FT	
SH1019	0.600	0.600	0.045	0.015	0.120	
SH1044	0.625	0.625	0.050	0.015	0.138	
SH2754	0.625	0.625	0.065	0.050	0.173	
SH0937	0.750	0.750	0.050	0.015	0.168	
SH2892	0.750	0.750	0.062	0.015	0.205	
SH0847	0.750	0.750	0.065	0.125	0.214	
SH0203	0.750	0.750	0.085	0.062	0.268	
SH0504	0.750	0.750	0.125	0.015	0.376	
SH0848	0.750	0.750	0.125	0.060	0.372	
SH3285	0.750	0.750	0.125	0.079	0.370	
SH4149	0.750	0.750	0.125	0.100	0.365	
SH0818	0.800	0.800	0.050	0.094	0.179	
SH2931	0.800	0.800	0.075	0.062	0.257	
SH0046	0.820	0.820	0.050	0.094	0.185	
SH0519	0.875	0.875	0.099	0.060	0.366	
SH0047	0.938	0.938	0.050	0.125	0.212	
SH0002	0.982	0.982	0.062	0.125	0.265	
SH1357	1.000	1.000	0.060	0.062	0.268	
SH0262	1.000	1.000	0.062	0.015	0.280	
SH0200	1.000	1.000	0.062	0.125	0.268	
SH1847	1.000	1.000	0.079	0.015	0.349	
SH2960	1.000	1.000	0.087	0.155	0.360	
SH0199	1.000	1.000	0.090	0.125	0.378	
SH1846	1.000	1.000	0.118	0.015	0.499	
SH0006	1.000	1.000	0.125	0.015	0.526	*
SH0367	1.000	1.000	0.125	0.125	0.512	
SH1359	1.117	1.117	0.062	0.156	0.298	
SH2113	1.125	1.125	0.094	0.094	0.457	
SH2880	1.125	1.125	0.125	0.125	0.584	
SH1455	1.198	1.198	0.063	0.010	0.343	
SH0365	1.219	1.219	0.125	0.250	0.608	
SH0169	1.250	1.250	0.062	0.125	0.346	
SH3979	1.250	1.250	0.085	0.190	0.450	
SH0389	1.250	1.250	0.090	0.125	0.485	
SH2087	1.250	1.250	0.125	0.015	0.676	*
SH0260	1.250	1.250	0.125	0.093	0.666	
SH0993	1.250	1.250	0.125	0.125	0.659	
SH2935	1.313	1.313	0.125	0.125	0.697	
SH2324	1.375	1.375	0.125	0.063	0.746	
SH2507	1.420	1.420	0.125	0.094	0.769	
SH2334	1.500	1.500	0.053	0.125	0.358	
SH1361	1.500	1.500	0.062	0.047	0.426	
SH1380	1.500	1.500	0.087	0.062	0.587	
SH0366	1.500	1.500	0.100	0.250	0.631	
SH0126	1.500	1.500	0.125	0.015	0.826	*
SH0263	1.500	1.500	0.125	0.062	0.826	
SH0977	1.500	1.500	0.125	0.125	0.812	
SH2164	1.500	1.500	0.188	0.125	1.165	
SH1109	1.563	1.563	0.125	0.125	0.847	
SH1181	1.625	1.625	0.150	0.125	1.046	
SH2325	1.627	1.627	0.188	0.125	1.298	

DIE #	A	B	C	D	WT/FT	
SH3510	1.687	1.687	0.125	0.125	0.937	
SH1225	1.688	1.688	0.063	0.125	0.479	
SH0901	1.688	1.688	0.125	0.125	0.923	
SH2154	1.700	1.700	0.125	0.219	0.905	
SH1403	1.735	1.735	0.100	0.062	0.775	
SH2008	1.750	1.750	0.093	0.015	0.739	
SH1317	1.750	1.750	0.125	0.015	0.976	*
SH0648	1.750	1.750	0.125	0.125	0.959	
SH2610	1.750	1.750	0.188	0.125	1.394	
SH1020	2.000	2.000	0.080	0.015	0.737	
SH3779	2.000	2.000	0.090	0.375	0.764	
SH0287	2.000	2.000	0.100	0.030	0.912	
SH3172	2.000	2.000	0.120	0.375	1.006	
SH0133	2.000	2.000	0.125	0.015	1.126	*
SH0165	2.000	2.000	0.125	0.125	1.109	
SH2139	2.000	2.000	0.125	0.125	1.110	++
SH0517	2.000	2.000	0.125	0.187	1.093	
SH1820	2.000	2.000	0.125	0.250	1.075	
SH0440	2.000	2.000	0.187	0.060	1.625	
SH2077	2.000	2.000	0.188	0.015	1.631	*
SH1706	2.000	2.000	0.188	0.125	1.656	
SH2088	2.000	2.000	0.250	0.015	2.100	*
SH2804	2.000	2.000	0.250	0.094	2.155	
SH0397	2.000	2.000	0.250	0.125	2.084	
SH3527	2.000	2.000	0.250	0.375	1.972	
SH2615	2.080	2.080	0.125	0.125	1.157	
SH0441	2.313	2.313	0.125	0.125	1.313	
SH0545	2.335	2.335	0.140	0.250	1.415	
SH3239	2.375	2.375	0.125	0.188	1.318	
SH3031	2.375	2.375	0.148	0.125	1.566	
SH2050	2.375	2.375	0.250	0.188	2.514	
SH0568	2.500	2.500	0.125	0.016	1.424	*
SH0177	2.500	2.500	0.125	0.060	1.426	
SH1034	2.500	2.500	0.125	0.125	1.409	
SH2542	2.500	2.500	0.125	0.250	1.376	
SH2867	2.500	2.500	0.150	0.200	1.654	
SH0442	2.500	2.500	0.188	0.125	2.087	
SH0390	2.500	2.500	0.188	0.125	2.070	
SH2877	2.500	2.500	0.250	0.125	2.684	
SH0633	2.564	2.564	0.125	0.125	1.451	
SH1017	2.568	2.568	0.125	0.312	1.402	
SH1166	2.600	2.600	0.125	0.125	1.470	
SH0443	2.625	2.625	0.125	0.125	1.484	
SH3238	2.688	2.688	0.146	0.188	1.750	
SH4080	2.700	2.700	0.120	0.125	1.481	
SH2386	2.780	2.780	0.250	0.250	2.988	
SH3301	2.950	2.950	0.200	0.015	2.640	

* Indicates Aluminum Association Standard Tubes
++ Note SH2139 is 2x2x0.125 w/ 0.030" Inside Radius

Square Tubes Continued Next Page

Square Tubes



DIE #	A	B	C	D	WT/FT	
SH1013	3.000	3.000	0.090	0.312	1.207	
SH0190	3.000	3.000	0.125	0.060	1.726	
SH1105	3.000	3.000	0.125	0.125	1.709	
SH0579	3.000	3.000	0.125	0.250	1.676	
SH1014	3.000	3.000	0.187	0.312	2.449	
SH2089	3.000	3.000	0.188	0.015	2.531	*
SH0444	3.000	3.000	0.188	0.125	2.522	
SH2090	3.000	3.000	0.250	0.015	3.300	*
SH1084	3.000	3.000	0.250	0.125	3.284	
SH1739	3.080	3.080	0.068	0.015	0.983	
SH2657	3.125	3.125	0.250	0.125	3.434	
SH2890	3.375	3.375	0.313	0.250	4.530	
SH0445	3.437	3.437	0.187	0.125	2.905	
SH4032	3.437	3.437	0.250	0.125	3.824	
SH4259	3.500	3.500	0.188	0.015	2.989	
SH3302	3.500	3.500	0.225	0.015	3.538	
SH1061	3.970	3.970	0.125	0.312	2.243	
SH0870	4.000	4.000	0.090	0.062	1.685	
SH0635	4.000	4.000	0.125	0.015	2.326	*
SH2958	4.000	4.000	0.125	0.250	2.276	
SH1924	4.000	4.000	0.250	0.015	4.500	*
SH2473	4.000	4.000	0.250	0.188	4.464	
SH4307	4.000	4.000	0.375	0.015	6.526	
SH3366	6.000	6.000	0.140	0.015	3.938	**Upcharge SH3366 $0.10/lb.
SH4258	6.000	6.000	0.188	0.015	5.245	

* Indicates Aluminum Association Standard Tubes

Round Tubes/Pipe



DIE #	A	B	I.D.	WT/FT	
SH0688	0.4375	0.125	0.188	0.148	
SH3267	0.500	0.062	0.376	0.102	
SH2377	0.500	0.083	0.334	0.131	
SH2195	0.605	0.106	0.393	0.199	
SH2140	0.625	0.049	0.527	0.107	
SH2425	0.625	0.065	0.495	0.137	
SH0378	0.675	0.085	0.505	0.190	
SH3754	0.687	0.094	0.500	0.209	
SH1142	0.688	0.164	0.360	0.324	
SH0412	0.720	0.065	0.590	0.161	
SH1527	0.733	0.072	0.589	0.180	
SH0741	0.750	0.050	0.650	0.132	
SH1307	0.750	0.118	0.514	0.281	
SH2098	0.840	0.109	0.622	0.300	* 1/2" Sch 40
SH0928	0.860	0.266	0.328	0.595	
SH0411	0.875	0.049	0.777	0.152	
SH0379	0.875	0.058	0.759	0.179	
SH0292	0.875	0.120	0.635	0.342	
SH1528	0.928	0.083	0.762	0.264	
SH1310	1.000	0.049	0.902	0.175	
SH0016	1.000	0.065	0.870	0.229	
SH1237	1.000	0.100	0.800	0.340	
SH0931	1.000	0.125	0.750	0.413	
SH0647	1.000	0.235	0.530	0.678	
SH0890	1.000	0.265	0.470	0.734	
SH0972	1.050	0.113	0.824	0.400	* 3/4" Sch 40
SH2183	1.088	0.090	0.908	0.338	
SH0526	1.125	0.083	0.959	0.326	
SH1554	1.125	0.094	0.937	0.365	
SH1140	1.250	0.050	1.150	0.227	
SH3647	1.250	0.083	1.084	0.365	
SH1747	1.250	0.125	1.000	0.530	
SH1268	1.310	0.280	0.750	1.087	
SH0698	1.315	0.133	1.049	0.593	* 1" Sch 40
SH0377	1.315	0.179	0.957	0.767	* 1" Sch 80
SH1562	1.360	0.060	1.240	0.294	
SH1553	1.490	0.115	1.260	0.596	
SH0170	1.500	0.065	1.370	0.352	
SH1719	1.500	0.083	1.334	0.443	
SH0593	1.500	0.090	1.320	0.479	
SH1308	1.500	0.100	1.300	0.528	
SH3013	1.500	0.115	1.270	0.600	
SH0801	1.500	0.125	1.250	0.648	
SH2230	1.500	0.250	1.000	1.178	
SH0940	1.615	0.385	0.845	1.786	
SH3637	1.625	0.438	0.750	1.958	
SH0225	1.660	0.140	1.380	0.803	* 1-1/4" Sch 40
SH1325	1.660	0.191	1.278	1.058	* 1-1/4" Sch 80
SH0994	1.687	0.200	1.287	1.121	
SH2650	1.750	0.083	1.584	0.522	
SH2623	1.750	0.125	1.500	0.766	
SH3304	1.800	0.140	1.520	0.876	
SH0632	1.880	0.650	0.580	3.014	
SH1494	1.900	0.059	1.782	0.409	
SH0145	1.900	0.145	1.610	0.960	* 1-1/2" Sch 40
SH1341	1.900	0.180	1.540	1.168	
SH2084	1.900	0.200	1.500	1.282	* 1-1/2" Sch 80
SH1286	1.920	0.060	1.800	0.421	
SH2480	1.937	0.085	1.767	0.594	

DIE #	A	B	I.D.	WT/FT	
SH1861	2.000	0.062	1.876	0.454	
SH2651	2.000	0.083	1.834	0.600	
SH0150	2.000	0.088	1.824	0.634	
SH0547	2.000	0.125	1.750	0.883	
SH2522	2.000	0.151	1.699	1.050	
SH0549	2.000	0.180	1.640	1.235	
SH0646	2.190	0.285	1.620	2.047	
SH1401	2.190	0.090	2.010	0.713	
SH1368	2.205	0.118	1.969	0.929	
SH0853	2.375	0.154	2.067	1.290	* 2" Sch 40
SH0906	2.375	0.218	1.939	1.772	* 2" Sch 80
SH2027	2.500	0.090	2.320	0.817	
SH1243	2.500	0.125	2.250	1.120	
SH0178	2.500	0.188	2.124	1.639	
SH2776	2.750	0.090	2.570	0.902	
SH0907	2.875	0.203	2.469	2.045	* 2-1/2 Sch 40
SH2028	3.000	0.090	2.820	0.988	
SH1465	3.000	0.100	2.800	1.093	
SH1244	3.000	0.125	2.750	1.355	
SH3852	3.000	0.250	2.500	2.592	
SH1474	3.040	0.100	2.840	1.109	
SH2214	3.250	0.125	3.000	1.472	
SH2774	3.250	0.250	2.750	2.827	
SH0878	3.250	0.281	2.688	3.145	
SH0172	3.250	0.375	2.500	4.064	
SH1321	3.500	0.090	3.320	1.157	
SH0908	3.500	0.216	3.068	2.675	* 3" Sch 40
SH2029	4.000	0.090	3.820	1.327	
SH4044	4.000	0.125	3.750	1.826	
SH1221	4.000	0.226	3.548	3.126	* 3-1/2" Sch 40
SH0207	4.000	0.318	3.364	4.414	* 3-1/2" Sch 80
SH2237	4.000	0.500	3.000	6.598	
SH3303	4.062	0.219	3.624	3.166	
SH1621	4.500	0.090	4.320	1.496	
SH4083	4.500	0.120	4.260	1.981	
SH2104	4.500	0.237	4.026	3.809	* 4" Sch 40
SH2030	5.000	0.090	4.820	1.666	

'P' Tubes



DIE #	A	B	C	D	E	F	WT/FT
SH0731	1.000	0.650	0.433	0.064	0.080	0.015	0.178
SH0608	2.000	1.000	1.000	0.125	0.015	0.110	0.668
SH0506	2.000	1.000	1.000	0.188	0.062	0.062	0.959
SH1076	2.250	1.020	1.020	0.125	0.015	0.015	0.997
SH0503	2.625	1.125	1.625	0.125	0.187	0.031	0.876
SH2333	2.650	1.500	1.500	0.125	0.020	0.020	0.718
SH1210	3.000	1.500	1.500	0.125	0.250	Full R.	1.020
SH1240	3.125	1.125	1.625	0.125	0.187	0.031	1.020
SH2240	3.220	1.700	1.640	0.095	0.020	0.020	0.899



Angles

DIE #	A	B	C	D	E	F	WT/FT	
SS0475	0.480	0.875	0.060	0.015	0.015	0.015	0.094	
SS2292	0.500	0.500	0.125	0.015	0.015	0.015	0.131	
SS2242	0.750	0.750	0.125	0.094	0.015	0.125	0.205	* L .75 x .75 x 1/8
SS3220	0.750	1.250	0.188	0.015	0.015	0.015	0.536	
SS4037	0.750	1.500	0.062	0.015	0.015	0.015	0.163	
SS3474	0.750	2.500	0.125	0.015	0.015	0.015	0.468	
SS1504	0.875	1.000	0.125	0.015	0.015	0.015	0.262	
SS2604	1.000	0.500	0.125	0.015	0.015	0.015	0.206	
SS2528	1.000	1.000	0.062	0.015	0.015	0.015	0.144	
SS0003	1.000	1.000	0.125	0.015	0.015	0.015	0.281	
SS1954	1.000	1.000	0.125	0.094	0.010	0.125	0.281	* L 1 x 1 x 1/8
SS2096	1.000	1.000	0.188	0.094	0.015	0.125	0.407	* L 1 x 1 x 3/16
SS3022	1.000	1.000	0.188	0.094	0.063	0.063	0.398	
SS2097	1.000	1.000	0.250	0.094	0.015	0.125	0.524	* L 1 x 1 x 1/4
SS3526	1.000	1.250	0.125	0.015	0.015	0.015	0.318	
SS1358	1.000	1.500	0.062	0.015	0.015	0.015	0.181	
SS1360	1.000	1.500	0.080	Full R.	0.060	0.080	0.231	
SS0449	1.000	1.500	0.125	0.015	0.015	0.015	0.356	
SS1570	1.000	2.000	0.063	Full R.	0.010	0.010	0.221	
SS2839	1.000	2.000	0.125	0.015	0.015	0.015	0.431	
SS2818	1.000	3.000	0.080	0.040	0.060	0.080	0.376	
SS0128	1.000	3.000	0.125	0.015	0.015	0.015	0.581	
SS2819	1.000	5.000	0.090	0.045	0.070	0.090	0.637	
SS1291	1.050	1.350	0.250	0.030	0.100	0.060	0.641	
SS0058	1.125	1.125	0.065	0.063	0.127	0.062	0.166	
SS1144	1.250	1.250	0.125	0.015	0.015	0.015	0.356	
SS1362	1.250	1.250	0.125	Full R.	0.010	0.010	0.356	
SS2190	1.250	1.250	0.188	0.125	0.010	0.188	0.521	* L 1.25 x 1.25 x 3/16
SS2340	1.250	1.250	0.250	0.125	0.010	0.188	0.676	* L 1.25 x 1.25 x 1/4
SS3277	1.250	1.750	0.188	0.125	0.015	0.187	0.635	
SS1984	1.313	0.750	0.070	0.015	0.015	0.015	0.167	
SS0103	1.500	1.500	0.125	0.015	0.015	0.015	0.431	
SS1137	1.500	1.500	0.125	0.047	0.047	0.060	0.430	
SS1823	1.500	1.500	0.125	0.125	0.015	0.125	0.427	* L 1.5 x 1.5 x 1/8
SS1745	1.500	1.500	0.160	0.015	0.015	0.015	0.545	
SS2078	1.500	1.500	0.188	0.125	0.015	0.188	0.634	* L 1.5 x 1.5 x 3/16
SS0060	1.500	1.500	0.188	0.015	0.015	0.015	0.632	
SS0040	1.500	1.500	0.250	0.125	0.015	0.171	0.824	
SS2152	1.500	1.500	0.250	0.125	0.188	0.016	0.808	
SS0144	1.500	2.000	0.125	0.015	0.015	0.015	0.496	
SS0448	1.500	2.000	0.188	0.015	0.015	0.015	0.758	
SS3961	1.500	2.000	0.250	0.100	0.015	0.100	0.972	
SS2648	1.500	2.000	0.250	0.125	0.015	0.172	0.974	
SS1472	1.750	1.750	0.125	0.015	0.010	0.010	0.506	
SS1742	1.750	2.500	0.190	0.015	0.015	0.015	0.926	

* Indicates American Standard Angle

Angles Continued Next Page



Angles

DIE #	A	B	C	D	E	F	WT/FT	
SS1511	2.000	2.000	0.125	0.015	0.015	0.015	0.581	
SS1955	2.000	2.000	0.125	0.125	0.010	0.250	0.589	* L2 x 2 x 1/8
SS1231	2.000	2.000	0.188	0.015	0.015	0.015	0.858	
SS1914	2.000	2.000	0.188	0.125	0.010	0.250	0.866	* L 2 x 2 x 3/16
SS0166	2.000	2.000	0.188	Full R.	0.125	0.125	0.848	
SS1252	2.000	2.000	0.250	0.015	0.015	0.015	1.124	
SS0336	2.000	2.000	0.250	0.125	0.015	0.250	1.133	* L 2 x 2 x 1/4
SS0185	2.000	2.000	0.375	0.015	0.015	0.015	1.631	
SS2079	2.000	2.000	0.375	0.125	0.015	0.250	1.639	* L2 x 2 x 3/8
SS0167	2.000	2.500	0.250	Full R.	0.250	0.188	1.252	
SS2075	2.000	3.000	0.188	0.188	0.010	0.312	1.090	* L 3 x 2 x 3/16
SS3212	2.000	3.000	0.250	0.015	0.015	0.015	1.424	
SS1145	2.000	3.000	0.250	0.188	0.015	0.312	1.432	* L 3 x 2 x 1/4
SS2607	2.000	3.188	0.188	0.062	0.125	0.015	1.120	
SS2861	2.000	4.000	0.188	0.015	0.015	0.015	1.312	
SS0917	2.000	4.000	0.250	0.020	0.020	0.020	1.724	
SS2860	2.190	8.000	0.188	0.015	0.015	0.015	2.256	
SS4211	2.250	1.000	0.250	0.010	0.010	0.010	0.900	
SS3107	2.250	4.250	0.188	0.015	0.015	0.015	1.424	
SS3983	2.313	4.250	0.125	0.015	0.015	0.015	0.966	
SS3984	2.438	8.000	0.125	0.015	0.015	0.015	1.547	
SS3106	2.438	8.000	0.188	0.015	0.015	0.015	2.312	
SS0148	2.500	2.000	0.188	0.015	0.015	0.015	0.961	
SS4144	2.500	2.500	0.125	0.015	0.015	0.015	0.731	
SS2276	2.500	2.500	0.188	0.125	0.010	0.250	1.091	* L 2.5 x 2.5 x 3/16
SS2403	2.500	2.500	0.250	0.125	0.015	0.250	1.433	* L 2.5 x 2.5 x 1/4
SS0742	2.500	2.500	0.250	0.125	0.015	0.500	1.478	
SS1760	2.500	2.500	0.375	0.010	0.060	0.060	2.081	
SS1774	2.500	3.500	0.375	0.250	0.015	0.312	2.524	
SS0052	2.875	3.875	0.500	0.125	0.250	0.062	3.719	
SS0380	3.000	3.000	0.125	0.015	0.015	0.015	0.881	
SS3738	3.000	3.000	0.125	0.015	0.140	0.015	0.876	
SS1956	3.000	3.000	0.125	0.125	0.010	0.250	0.889	
SS0381	3.000	3.000	0.188	0.015	0.015	0.015	1.312	
SS0176	3.000	3.000	0.250	0.015	0.015	0.015	1.724	
SS2080	3.000	3.000	0.250	0.250	0.015	0.313	1.718	* L 3 x 3 x 1/4
SS2286	3.000	4.000	0.250	0.250	0.015	0.375	2.029	* L 3 x 4 x 1/4
SS2993	3.000	4.000	0.375	0.375	0.015	0.375	2.945	
SS4290	3.000	5.000	0.375	0.250	0.015	0.250	3.415	
SS1848	3.500	3.500	0.250	0.250	0.015	0.375	2.029	* L 3.5 x 3.5 x 1/4
SS0186	3.875	3.875	0.500	0.125	0.250	0.062	4.319	
SS2081	4.000	4.000	0.250	0.250	0.015	0.375	2.329	* L 4 x 4 x 1/4
SS3898	4.000	4.000	0.375	0.015	0.015	0.015	3.431	
SS3993	4.000	4.750	0.375	0.015	0.015	0.125	3.773	
SS3419	4.000	6.000	0.375	0.375	0.015	0.375	4.295	
SS3376	5.000	5.000	0.250	0.125	0.125	0.375	2.950	

* Indicates American Standard Angle

Equal Wall Channels



DIE #	A	B	C	D	E	F	WT/FT
SS0500	0.375	0.750	0.125	0.015	0.015	0.015	0.187
SS1816	0.500	2.000	0.125	0.015	0.015	0.015	0.413
SS0216	0.500	1.000	0.125	0.015	0.015	0.015	0.263
SS2068	0.500	1.250	0.125	0.010	0.010	0.010	0.300
SS3109	0.563	1.500	0.100	0.015	0.015	0.015	0.330
SS2862	0.563	3.000	0.125	0.015	0.015	0.015	0.581
SS1213	0.625	0.625	0.060	0.015	0.015	0.015	0.126
SS3719	0.625	1.500	0.063	0.015	0.015	0.015	0.197
SS3752	0.625	5.250	0.125	0.015	0.015	0.015	0.937
SS3505	0.750	0.500	0.062	0.010	0.010	0.010	0.139
SS3901	0.750	0.625	0.063	0.015	0.015	0.015	0.150
SS1852	0.750	1.250	0.150	0.010	0.010	0.010	0.442
SS0201	0.750	1.500	0.058	0.015	0.015	0.015	0.201
SS3745	0.920	1.200	0.250	0.030	0.030	0.030	0.761
SS0004	1.000	1.000	0.125	0.015	0.015	0.015	0.413
SS2287	1.000	1.500	0.125	0.015	0.015	0.015	0.487
SS2204	1.000	2.000	0.125	0.015	0.015	0.015	0.563
SS0564	1.000	2.000	0.125	0.125	0.015	0.015	0.554
SS1689	1.000	2.000	0.250	0.015	0.015	0.015	1.050
SS3806	1.000	3.000	0.125	0.015	0.015	0.015	0.713
SS3751	1.000	5.250	0.250	0.015	0.015	0.015	1.050
SS1254	1.164	1.888	0.250	0.015	0.250	0.125	1.091
SS3817	1.250	0.750	0.063	0.015	0.015	0.015	0.234
SS3681	1.250	1.125	0.250	0.015	0.015	0.015	0.937
SS3052	1.250	1.250	0.125	0.015	0.015	0.015	0.524
SS2660	1.250	2.000	0.250	0.015	0.250	0.150	1.036
SS1212	1.250	3.000	0.125	0.015	0.015	0.015	0.787
SS0141	1.250	4.000	0.188	0.188	0.015	0.187	1.378
SS3473	1.313	5.000	0.188	0.040	0.125	0.125	1.633
SS2775	1.313	6.000	0.250	0.040	0.125	0.125	2.436
SS3340	1.375	2.250	0.125	0.015	0.015	0.219	0.737
SS1197	1.500	1.000	0.313	0.015	0.015	0.015	1.266
SS1867	1.500	1.250	0.125	Full R.	0.015	0.015	0.596
SS0750	1.500	1.550	0.125	0.063	0.063	0.015	0.643
SS2622	1.500	1.750	0.188	0.015	0.015	0.015	0.986
SS0930	1.500	2.500	0.125	0.015	0.010	0.010	0.774
SS2741	1.500	2.500	0.188	0.015	0.015	0.015	1.156
SS1375	1.750	1.500	0.375	0.010	0.010	0.010	1.913
SS3581	1.750	1.750	0.125	0.015	0.015	0.015	0.750
SS0749	1.750	1.850	0.125	0.015	0.063	0.015	0.763
SS2360	1.750	3.000	0.100	0.010	0.010	0.010	0.756
SS1944	1.750	3.000	0.200	0.010	0.010	0.010	1.464
SS0748	1.938	2.150	0.125	0.015	0.063	0.026	0.864
SS0900	1.952	1.869	0.250	Full R.	0.250	0.063	1.536
SS3334	2.000	2.000	0.250	0.031	0.031	0.031	1.649
SS2579	2.000	2.376	0.188	0.031	0.031	0.031	1.352
SS4066	2.000	3.250	0.188	0.015	0.015	0.015	1.547
SS1724	2.000	4.000	0.125	0.015	0.015	0.015	1.163
SS3009	2.000	4.000	0.250	0.250	0.015	0.250	2.250
SS0294	2.250	3.000	0.250	0.015	0.015	0.015	2.100
SS3992	2.500	3.063	0.500	0.015	0.015	0.015	4.237
SS0231	2.750	1.500	0.125	0.015	0.015	0.015	1.013
SS1969	2.750	2.438	0.188	0.015	0.015	0.015	1.706
SS3227	2.750	3.500	0.188	0.020	0.020	0.020	1.940

Equal Wall Channels Continued Next Page

Equal Wall Channels



DIE #	A	B	C	D	E	F	WT/FT
SS3342	3.000	2.500	0.250	0.015	0.015	0.015	2.400
SS2641	3.000	2.376	0.188	0.015	0.125	0.015	1.789
SS1683	3.188	1.437	0.188	0.015	0.015	0.015	1.678
SS1149	4.000	2.565	0.250	0.015	0.015	0.015	3.023
SS2527	5.250	2.750	0.250	0.125	0.125	0.015	3.802
SS1748	5.640	1.749	0.140	0.015	0.265	0.125	2.113
SS1443	7.250	2.562	0.250	0.015	0.015	0.015	4.969

Unequal Wall Channels



DIE #	A	B	C	D	E	F	WT/FT
SS2420	0.370	1.500	0.180	0.120	0.010	0.010	0.324
SS1700	0.500	3.000	0.219	0.250	0.010	0.010	1.032
SS2427	0.750	1.500	0.156	0.125	0.015	0.015	0.458
SS1441	0.800	1.000	0.240	0.250	0.030	0.030	0.616
SS1440	1.200	1.000	0.240	0.375	0.030	0.030	0.924
SS4292	1.250	2.000	0.250	0.188	0.015	0.063	1.090
SS2973	1.500	2.000	0.120	0.125	0.015	0.125	0.701
SS4132	1.500	3.500	0.230	0.188	0.063	0.063	1.508

American Standard Channels

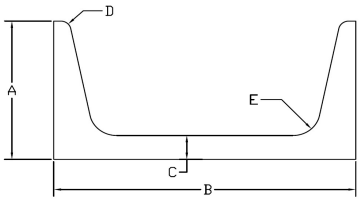

DIE #	A	B	C	D	E	WT/FT	
SS2091	1.410	3.000	0.170	0.100	0.270	1.447	C 3 x 1.42
SS0310	1.498	3.000	0.258	0.100	0.270	1.776	C 3 x 1.73
SS2338	1.580	4.000	0.180	0.110	0.280	1.884	C 4 x 1.85
SS3074	1.596	3.000	0.356	0.100	0.270	2.117	C 3 x 2.07
SS2092	1.647	4.000	0.247	0.110	0.280	2.209	C 4 x 2.16
SS2339	1.750	5.000	0.190	0.110	0.290	2.363	C 5 x 2.32
SS2093	1.885	5.000	0.325	0.110	0.290	3.173	C 5 x 3.11
SS2094	1.920	6.000	0.200	0.200	0.300	2.884	C 6 x 2.83
SS1858	1.945	6.000	0.225	0.120	0.300	3.064	C 6 x 3
SS2948	2.034	6.000	0.314	0.120	0.300	3.704	C 6 x 3.63
SS2074	2.290	8.000	0.250	0.130	0.320	4.336	C 8 x 4.25
SS3803	2.600	10.000	0.240	0.140	0.340	5.387	C 10 x 5.28

Aluminum Association Standard Channels



DIE #	A	B	C	D	E	F	WT/FT	
SS2353	1.000	2.000	0.130	0.130	0.015	0.100	0.588	CS 2 x 0.577
SS2642	1.250	2.000	0.260	0.170	0.015	0.150	1.093	CS 2 x 1.07
SS0446	1.500	3.000	0.200	0.130	0.015	0.250	1.158	CS 3 x 1.14
SS0387	2.000	4.000	0.230	0.150	0.015	0.250	1.774	CS 4 x 1.74
SS2284	2.250	4.000	0.290	0.190	0.015	0.250	2.377	CS 4 x 2.33
SS0388	2.250	5.000	0.260	0.150	0.015	0.300	2.257	CS 5 x 2.21
SS1490	2.500	6.000	0.290	0.170	0.010	0.300	2.892	CS 6 x 2.83
SS1980	2.750	5.000	0.320	0.190	0.015	0.300	3.152	CS 5 x 3.09

Flat Bars



DIE #	A	B	C	WT/FT
SS2483	0.500	0.188	Full R.	0.103
SS0385	0.500	0.500	0.015	0.300
SS2426	0.625	0.125	0.015	0.094
SS0474	0.625	0.250	0.015	0.187
SS2201	0.750	0.125	0.015	0.113
SS2025	0.750	0.188	Full R.	0.160
SS1608	0.750	0.190	0.030	0.170
SS0280	0.750	0.250	0.030	0.224
SS2988	0.750	0.375	0.125	0.322
SS3865	0.750	0.500	0.015	0.450
SS0386	0.750	0.750	0.015	0.676
SS3966	0.813	0.813	0.060	0.788
SS4128	0.875	0.750	0.030	0.787
SS1589	1.000	0.100	0.015	0.120
SS1988	1.000	0.125	0.015	0.150
SS0049	1.000	0.188	0.032	0.224
SS1917	1.000	0.250	0.010	0.300
SS0962	1.000	0.250	0.125	0.284
SS3440	1.000	0.250	0.125	0.284
SS0269	1.000	0.313	0.015	0.376
SS1609	1.000	0.375	0.030	0.450
SS2739	1.000	0.375	0.094	0.440
SS1970	1.000	0.500	0.015	0.600
SS3602	1.000	0.625	0.015	0.750
SS2196	1.000	0.750	0.015	0.900
SS0395	1.000	1.000	0.015	1.200
SS1575	1.112	0.250	0.031	0.332
SS0499	1.250	0.250	0.015	0.376
SS1611	1.250	0.500	Full R.	0.685
SS3783	1.250	0.625	0.015	0.937
SS3843	1.250	0.750	0.015	1.124
SS3842	1.250	1.000	0.015	1.500
SS1606	1.250	1.250	0.125	1.859
SS2205	1.500	0.125	0.015	0.224
SS0382	1.500	0.188	0.015	0.338
SS0960	1.500	0.250	0.030	0.449
SS2192	1.500	0.375	0.015	0.674
SS0738	1.500	0.500	0.015	0.900
SS0396	1.500	0.500	0.125	0.884
SS1045	1.500	1.500	0.015	2.700
SS1651	1.740	0.340	Full R.	0.680
SS2472	1.750	0.250	0.015	0.524
SS3439	1.750	0.285	0.030	0.598
SS2127	1.750	0.300	0.125	0.614
SS3684	1.750	0.375	0.015	0.787
SS0792	1.750	1.250	0.125	2.609
SS1141	2.000	0.125	0.015	0.300
SS0179	2.000	0.188	0.015	0.451
SS1736	2.000	0.188	Full R.,	0.442
SS1409	2.000	0.250	0.015	0.550
SS0080	2.000	0.250	0.030	0.599
SS1717	2.000	0.250	Full R.	0.584
SS3208	2.000	0.313	0.030	0.749
SS0619	2.000	0.375	0.010	0.900
SS2803	2.000	0.375	0.094	0.892
SS2978	2.000	0.375	0.188	0.864
SS1983	2.000	0.500	0.015	1.200
SS0087	2.000	0.625	0.015	1.500
SS1699	2.000	0.750	0.015	1.800
SS2083	2.000	1.000	0.015	2.400
SS0143	2.000	1.250	0.125	2.984
SS4180	2.000	1.500	0.015	3.600
SS2554	2.250	0.375	0.015	1.013
SS2887	2.370	0.375	0.015	1.067
SS3449	2.375	0.250	0.015	0.713

DIE #	A	B	C	WT/FT
SS0290	2.500	0.125	0.015	0.376
SS0383	2.500	0.188	0.015	0.564
SS1918	2.500	0.250	0.010	0.750
SS3438	2.500	0.250	0.125	0.734
SS1487	2.500	0.500	0.015	1.250
SS1701	2.500	0.625	0.015	1.874
SS2076	2.500	0.750	0.010	2.250
SS1751	2.984	0.188	0.010	0.673
SS0694	3.000	0.125	0.015	0.450
SS0180	3.000	0.188	0.015	0.677
SS1214	3.000	0.188	Full R.	0.667
SS0613	3.000	0.250	0.015	0.900
SS2509	3.000	0.313	Full R.	1.100
SS1959	3.000	0.375	0.010	1.350
SS1957	3.000	0.500	0.010	1.800
SS2203	3.000	0.750	0.015	2.700
SS1922	3.000	1.000	0.010	3.600
SS0423	3.500	0.188	0.015	0.790
SS0943	3.500	0.250	0.015	1.050
SS1174	3.500	0.281	0.015	1.050
SS3459	3.500	0.880	0.015	3.696
SS3111	4.000	0.125	0.015	0.600
SS0384	4.000	0.188	0.015	0.902
SS1112	4.000	0.250	0.015	1.200
SS0587	4.000	0.250	0.062	1.198
SS1603	4.000	0.375	0.020	1.800
SS1737	4.000	0.375	0.063	1.796
SS1690	4.000	0.500	0.010	2.400
SS3633	4.000	0.625	0.015	3.000
SS1921	4.000	0.750	0.010	3.600
SS1923	4.000	1.000	0.010	4.800
SS4208	4.250	0.375	0.020	1.912
SS2834	4.500	0.250	0.015	1.350
SS1072	4.500	0.437	0.015	2.359
SS2926	4.500	0.500	0.010	2.700
SS1619	4.500	0.594	0.015	3.208
SS3703	4.750	0.125	0.015	0.713
SS0348	5.000	0.250	0.015	1.500
SS1958	5.000	0.375	0.010	2.250
SS1773	5.000	0.500	0.015	3.000
SS0450	5.750	0.188	0.015	1.297
SS2465	5.750	0.250	0.015	1.724
SS0076	6.000	0.125	0.015	0.900
SS0154	6.000	0.250	0.015	1.800
SS1919	6.000	0.375	0.010	2.700
SS1920	6.000	0.500	0.010	3.600
SS2209	6.000	0.750	0.015	5.400
SS2373	6.000	1.000	0.015	7.200
SS3352	7.000	0.250	0.015	2.100
SS4071	8.000	0.125	0.015	1.200
SS2769	8.000	0.188	0.015	1.805
SS2082	8.000	0.250	0.015	2.400
SS1437	8.000	0.375	0.015	3.600
SS2661	8.000	0.500	0.015	4.800
SS3910	8.500	0.250	0.015	2.550
SS2813	9.000	0.125	0.015	1.350
SS1343	9.000	0.250	0.015	2.700
SS1512	9.000	0.375	0.015	4.050
SS1746	10.000	0.140	0.010	1.680
SS3525	10.000	0.375	0.015	4.500
SS1520	12.000	0.250	0.015	3.600

Round Bars



DIE #	A	WT/FT
SS0181	0.375	0.132
SS0453	0.410	0.158
SS3441	0.437	0.180
SS0338	0.500	0.235
SS0051	0.625	0.368
SS0020	0.750	0.531
SS1870	0.875	0.721
SS0189	1.000	0.942
SS0206	1.063	1.064
SS2085	1.250	1.472
SS0376	1.500	2.120
SS2512	1.875	3.313
SS1251	1.975	3.677
SS1695	2.000	3.770
SS1826	2.375	5.316

I-Beams



DIE #	A	B	C	D	E	F	WT/FT	
SS3724	1.500	1.500	0.125	0.125	0.015	0.015	0.637	
SS2239	1.700	1.300	0.080	0.080	0.020	0.020	0.397	
SS3732	2.000	1.000	0.125	0.100	0.200	0.015	0.551	
SS0137	2.032	3.255	0.250	0.250	0.063	Full R.	2.384	
SS1211	3.000	2.000	0.110	0.090	0.094	0.047	0.816	*
SS2134	3.000	2.000	0.156	0.125	0.094	0.047	1.158	
SS1103	3.000	2.330	0.170	0.170	0.270	0.015	2.148	
SS2687	4.000	3.000	0.125	0.125	0.062	0.015	1.466	
SS2095	4.000	3.000	0.230	0.150	0.250	0.015	2.357	*
SS2062	4.000	3.500	0.250	0.250	0.188	0.250	3.122	
SS2679	4.500	3.000	0.250	0.188	0.250	0.015	2.764	
SS2801	6.000	4.000	0.350	0.210	0.300	0.015	4.788	* (SS2801 Not Available In Alloy 6061)

* Indicates Aluminum Association Standard I-Beam

'T' Bars



DIE #	A	B	C	D	E	F	WT/FT
SS3463	0.750	1.500	0.125	0.125	0.015	0.015	0.318
SS3036	1.000	1.000	0.125	0.125	0.030	0.030	0.281
SS3196	1.000	2.000	0.100	0.100	0.015	0.015	0.348
SS1345	1.125	1.500	0.125	0.125	0.080	0.010	0.378
SS1744	1.125	3.000	0.125	0.125	0.030	0.030	0.599
SS1134	1.188	4.000	0.187	0.125	0.030	0.030	1.049
SS0094	1.188	4.500	0.188	0.188	0.125	0.015	1.248
SS3844	1.500	1.500	0.125	0.125	0.015	0.015	0.431
SS3624	1.500	3.000	0.188	0.188	0.015	0.015	0.970
SS1772	2.000	2.000	0.125	0.125	0.015	0.015	0.581
SS3280	2.000	2.000	0.250	0.250	0.015	0.015	1.124
SS0127	3.000	3.000	0.180	0.180	0.015	0.015	1.258
SS3307	3.000	4.000	0.180	0.180	0.015	0.015	1.472

'Z' Bars



DIE #	A	B	C	D	E	F	WT/FT
SS3062	0.500	0.500	0.500	0.090	0.010	0.010	0.143
SS1578	1.230	1.000	1.000	0.080	0.063	Full R.	0.295
SS0129	3.000	1.500	0.750	0.125	0.015	0.015	0.750
SS0220	3.000	2.688	2.688	0.250	0.313	0.250	2.381

NOTE: Check actual prints to confirm all walls and corners
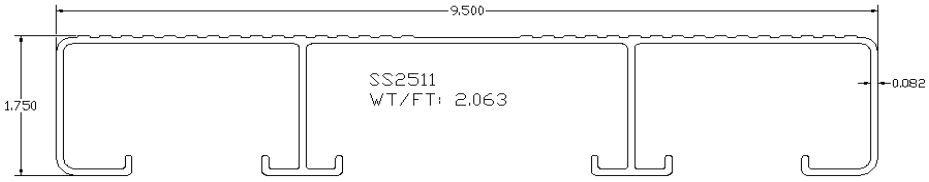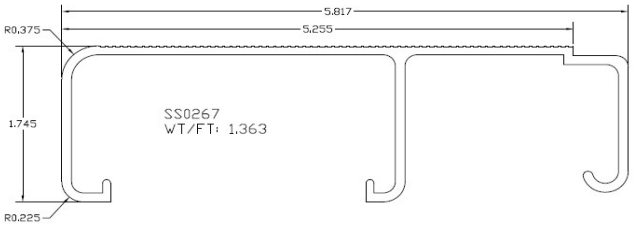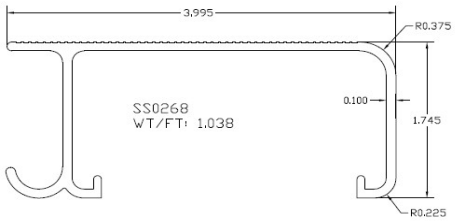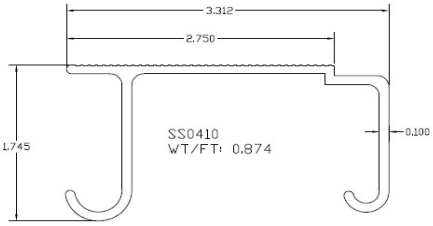
Aluminum Decking